

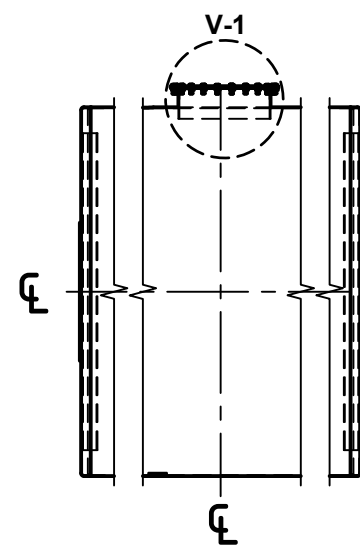
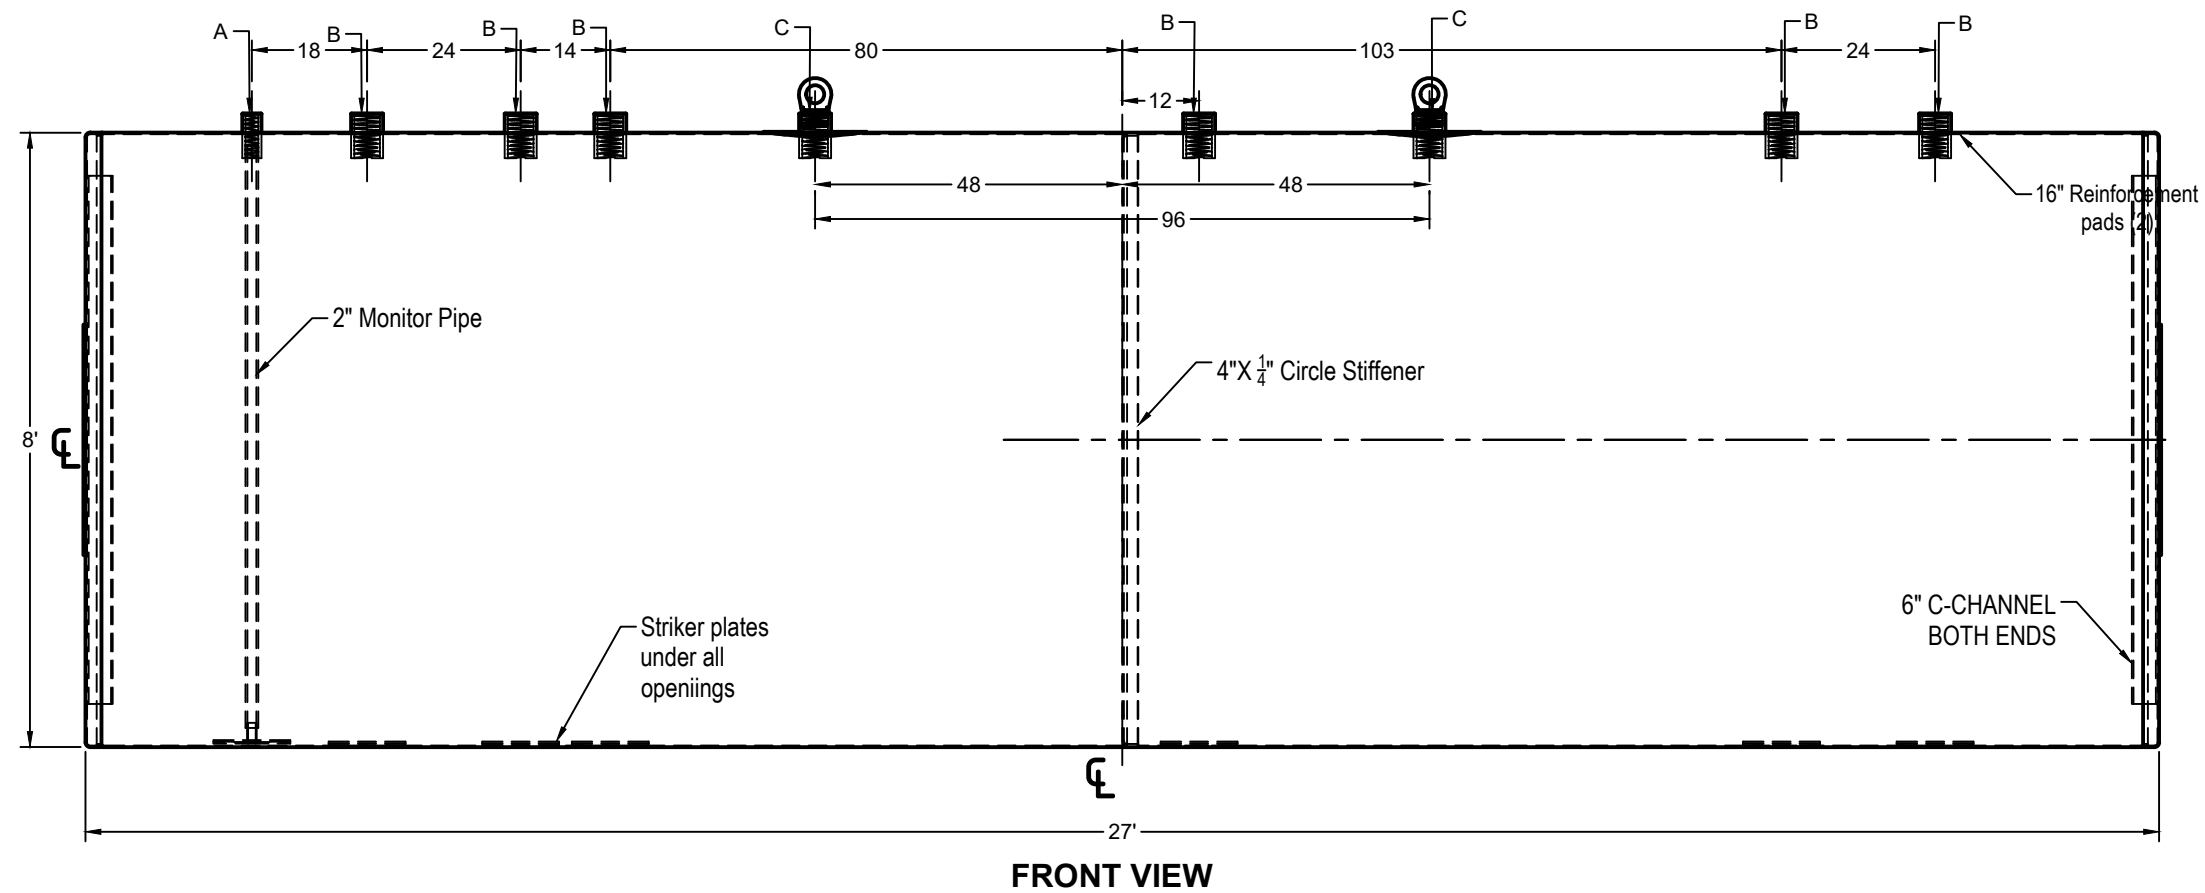


Standard Fitting Layout

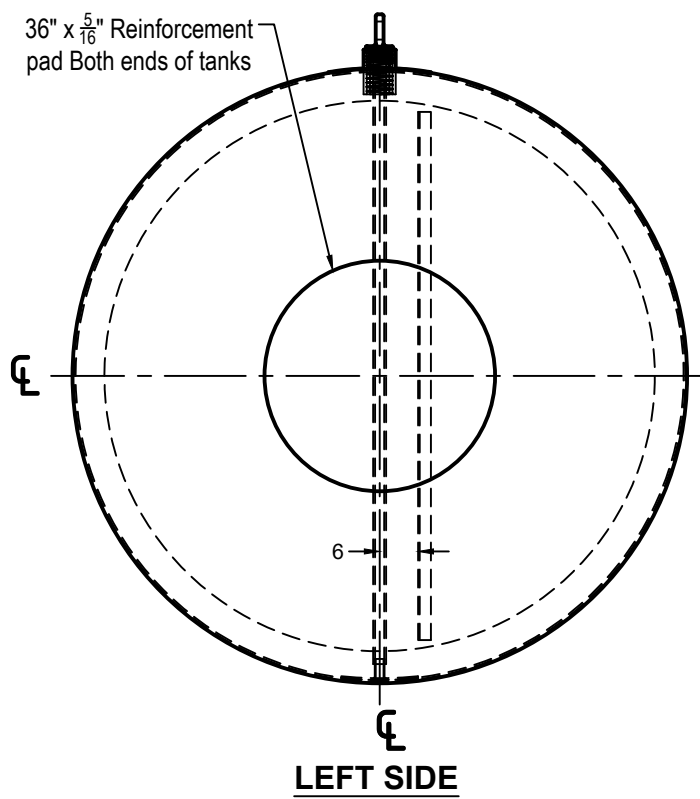

24"-30"-36" Optional Manhole with or with out fittings
42" SW Collar Optional

42" / 48"	SW (Single Wall)	Collar optional
42" / 48"	Square	Collar optional

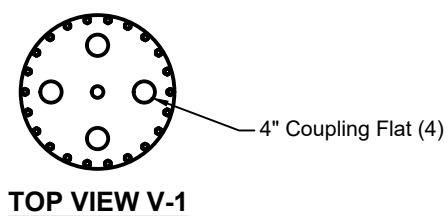

INSIDE DIMENTIONS		MATERIALS THICKNESS	
TANK LENGHT	27'	SHELL	1/4"
TANK DIAMETER	8'	HEADS	1/4"
A	3" Coupling W/ 2"Dialectic Bushing		Primary
B	5" Coupling W/ 4"Dialectic Bushing		Primary
C	4" Threaded Lifting Lug		Primary

CUSTOMER: HUGHES TANK COMPANY			
PROJECT: 10K Permatank			
CAPACITY:	10,152 Gallons	WEIGHT:	9,324 Lbs



NOTES:

- A. Design Pressure: Atmosferic.
- B. Design Temperature: Ambient.
- C. Exterior: Min. 100 mils FBG jacketed dual-wall Permatank®.
- D. Seal welded striker plates under all openings.
- E. All fittings to be protected for shipment.

DESIGN:

Fabricated per UL 58 specifications single wall construction.

- Air test are no less than 3 PSI and no more than 5 PSI.
- Primary tank to be tested alone. Secondary tank to be pressure tested with primary tank. This shall be accomplished by bleeding air from the primary tank to the secondary tank.

CUSTOMER APPROVAL

SIGNATURE: _____

DATE: _____

APROVED: Bobby Hughes

CHECKED: Bode Draper

DRAWN: Roosevelt Caceres